

SOIL MECHANICS

Compaction of Soil

- 5.1 Definition and purposes of soil compaction
- 5.2 Dry density and water content relationship
- 5.3 Laboratory test to obtain compaction characteristics
- 5.4 Factors affecting compaction
- 5.5 Effect of compaction on engineering behavior of fine grained soil
- 5.6 Methods of compaction and compaction control at field, relative compaction



SOIL COMPACTION

- Compaction is a process of pressing soil particles close to each other by mechanical methods.
- In compaction air is expelled from the void space in soil mass and thus dry density of soil is increased.
- In other words, compaction is the densification of soil by removal of air which requires mechanical energy.



Vibrating Plate

Rammer

Handy Compacting Tools



Walk Behind Rollers



Pneumatic Roller



Tamping Roller



Sheepfoot Roller




Smooth Roller



PURPOSE OF SOIL COMPACTION


- To increase the dry density of soil.
- Soil compaction is done to improve engineering properties such as shear strength, stability and bearing capacity.
- To decrease the undesirable settlement of structures.
- To control undesirable volume changes.

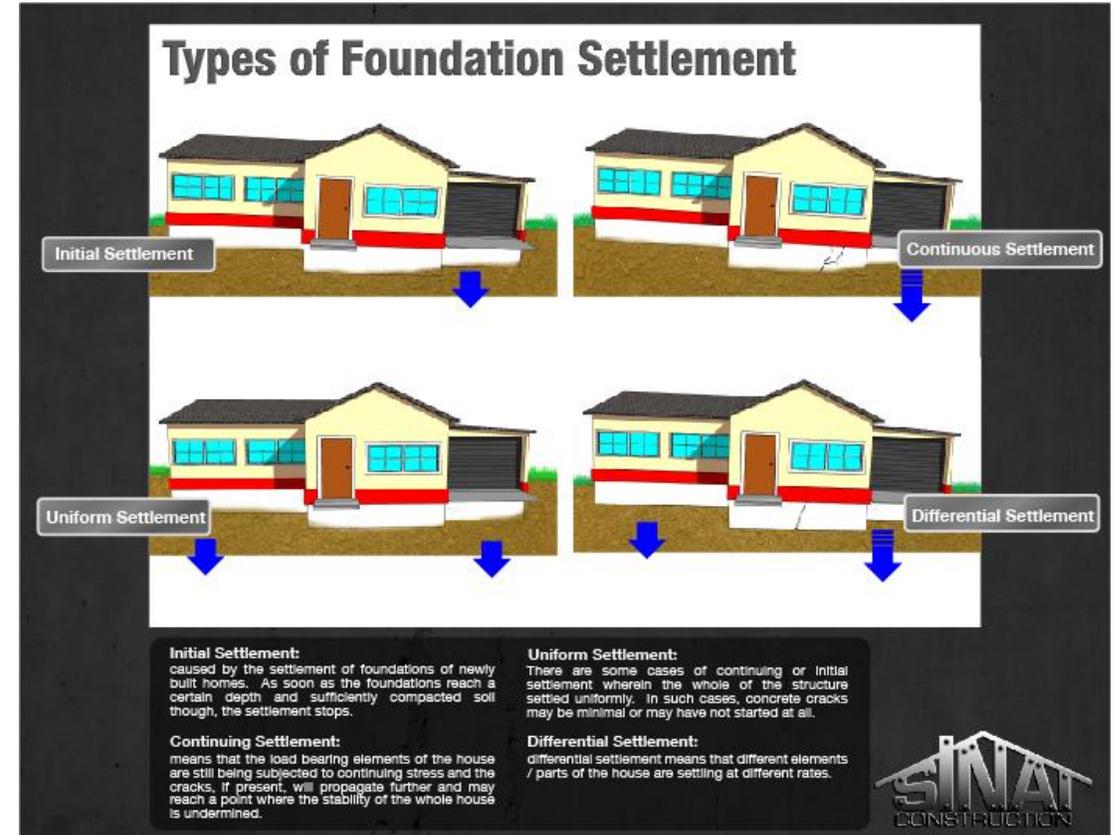

Abhash Acharya

DRY DENSITY AND WATER CONTENT RELATIONSHIP


- For any soil there exist a definite relationship between the soil water content and dry density to which the soil can be compacted and that for a specific amount of compaction energy or effort applied on the soil there is a particular water content at which the soil attains its maximum dry density.
- The water content corresponding to the maximum dry density is known as **Optimum Moisture Content (O.M.C.)** or **Optimum Water Content (O.W.C.)**.

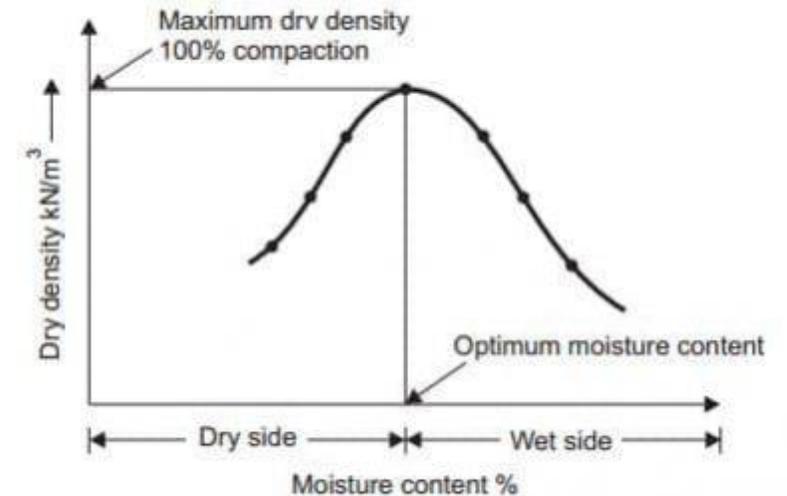

Abhash Acharya

DRY DENSITY AND WATER CONTENT RELATIONSHIP


- At a water content lower than the optimum, the soil is rather stiff and has lot of void spaces and, therefore the dry density is low.
- As the water content is increased, the soil particles get lubricated and slip over each other, and move into densely packed positions and the dry density is increased.

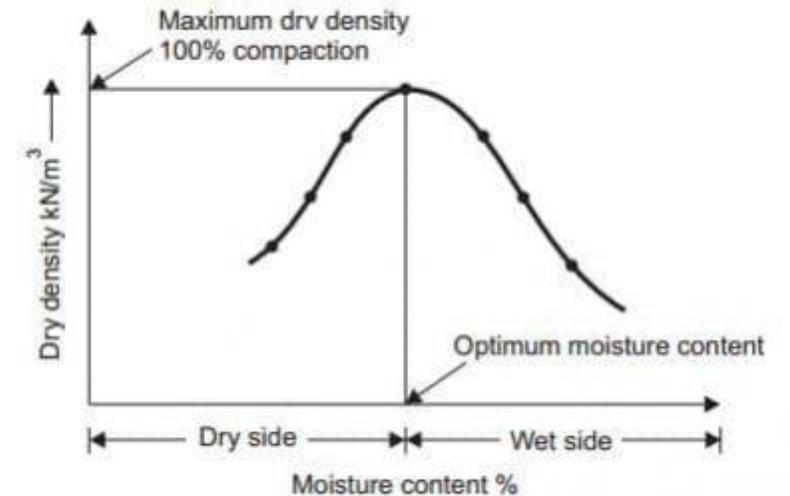

Abhash Acharya

DRY DENSITY AND WATER CONTENT RELATIONSHIP




- However, at a water content more than the optimum, the additional water reduces the dry density, as it occupies the space that might have been occupied by solid particles.
- The curve between water content and dry density is known as the **water content-dry density curve** or the **moisture content-dry density curve** or the **compaction curve**.

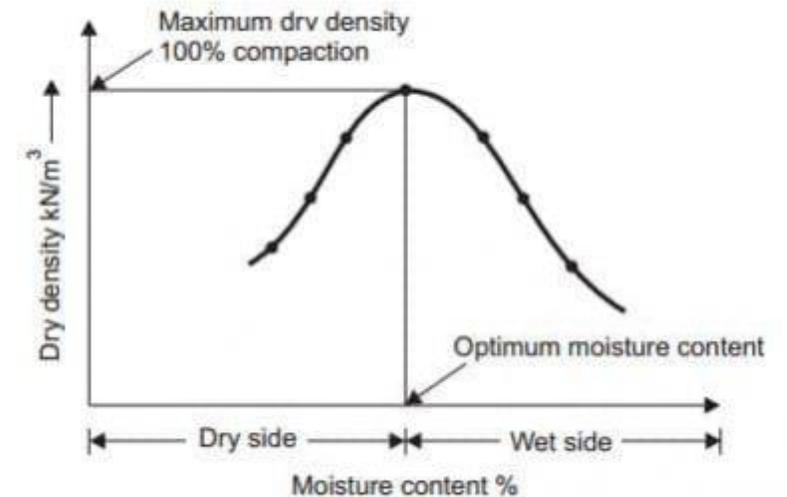

Abhash Acharya

LABORATORY TEST TO OBTAIN COMPACTION CHARACTERISTICS

- Standard Proctor Test
- Modified Proctor Test

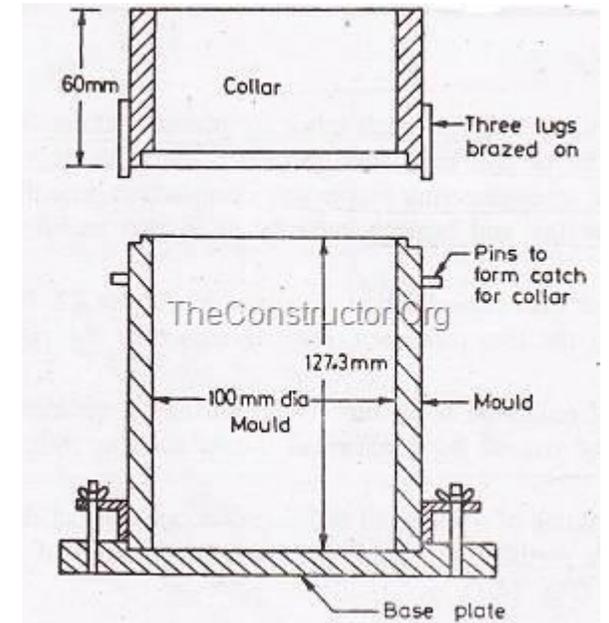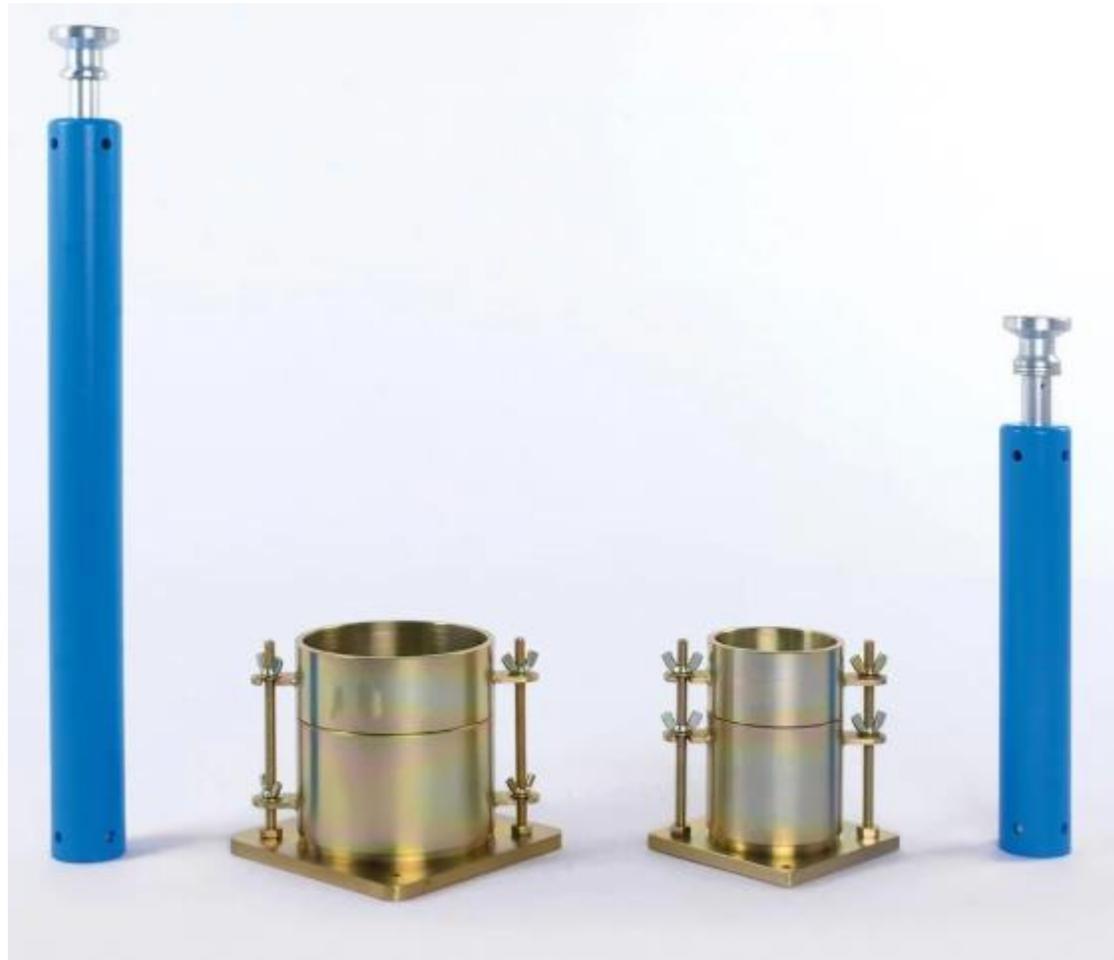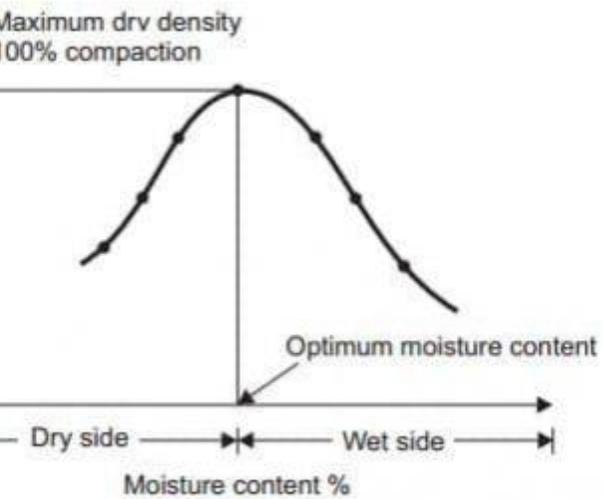

Abhash Acharya

STANDARD PROCTOR TEST

Procedure

- 2.5 kg of air-dried soil passing through 4.75mm is taken.
- Water is added to soil (4% for coarse grained and 8% for fine grained), such that the water content is less than expected optimum moisture content.

Sand	Sandy Silt or Silty Sand	Silt	Clay
6 to 10%	8 to 12%	12 to 16%	14 to 20%

- Take mass of mould with base plate but without collar (M1). The collar is fitted and soil is placed on the mould to about one-third.
- Soil is compacted using **2.5kg of rammer** falling through a height of **310mm** in 25 blows, evenly distributed over surface.

- Similarly, second and third layer of soil are filled and compacted.
- Collar is removed and soil above mould is trimmed off.
- Then mass of mould with base plate and compacted soil is taken (M2). So, the mass of compacted soil = M2-M1
- Now, Bulk Density (ρ) = (M2-M1)/V

$$\text{Where, } V = \text{Volume of the mould} = \frac{\pi d^2}{4} * H$$

Dry density (ρ_d) = $\frac{\rho}{1+w}$, w = water content obtained from oven drying method.


- Again, add some more water to increase the water content by (2-3) % and test is repeated. Plot ρ_d vs. w curve and determine the OMC and Maximum dry density.



Abhash Acharya

MODIFIED PROCTOR TEST

- It is the method developed during second world war due to the requirement of higher subgrade resistance of pavements.
- In this method same mould as in standard proctor test is used but the compaction effort is increased by using **4.5kg of rammer** falling through a height of **450mm**.
- The compaction of soil is done in **5 layers** with each layer receiving 25 blows of rammer.

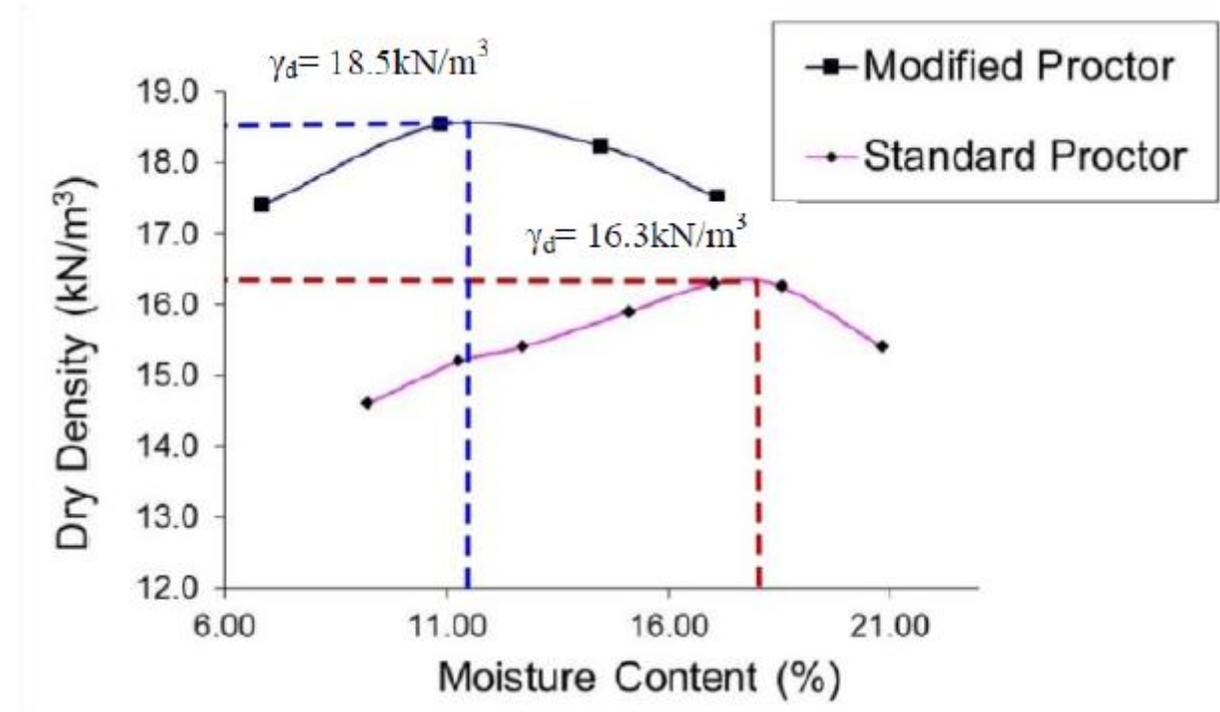

FACTORS AFFECTING COMPACTION

- Water Content
- Amount of Compaction
- Type of Soil
- Method of Compaction
- Admixtures




Abhash Acharya

FACTORS AFFECTING COMPACTION

- Water Content


- Initially ρ_d increases with increase in water content due to lubricating effect and results ease in compaction.
- However, at a water content more than the optimum, the additional water reduces the dry density, as it occupies the space that might have been occupied by solid particles.

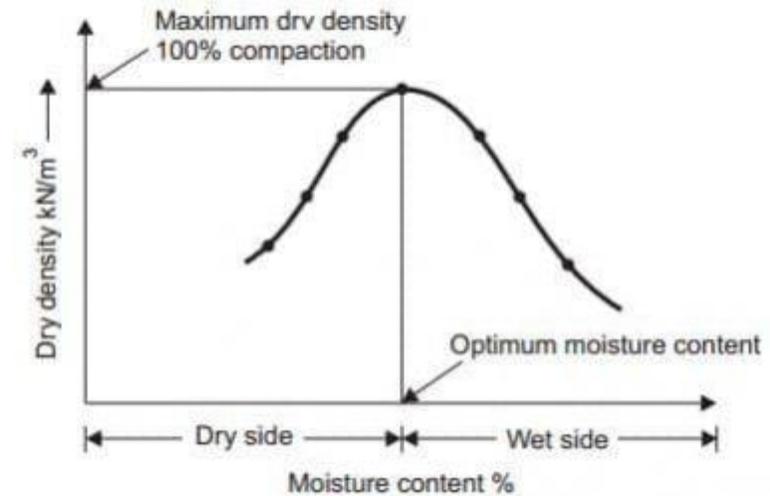

FACTORS AFFECTING COMPACTION

- Amount of Compaction


- The effect of increasing the amount of compactive effort is to increase the maximum dry density and to decrease the optimum water content.
- At a water content less than the optimum, the effect of increased compaction is more predominant.
- At a water content more than OMC, the volume of air voids become almost constant and the effect of increased compaction is not significant.

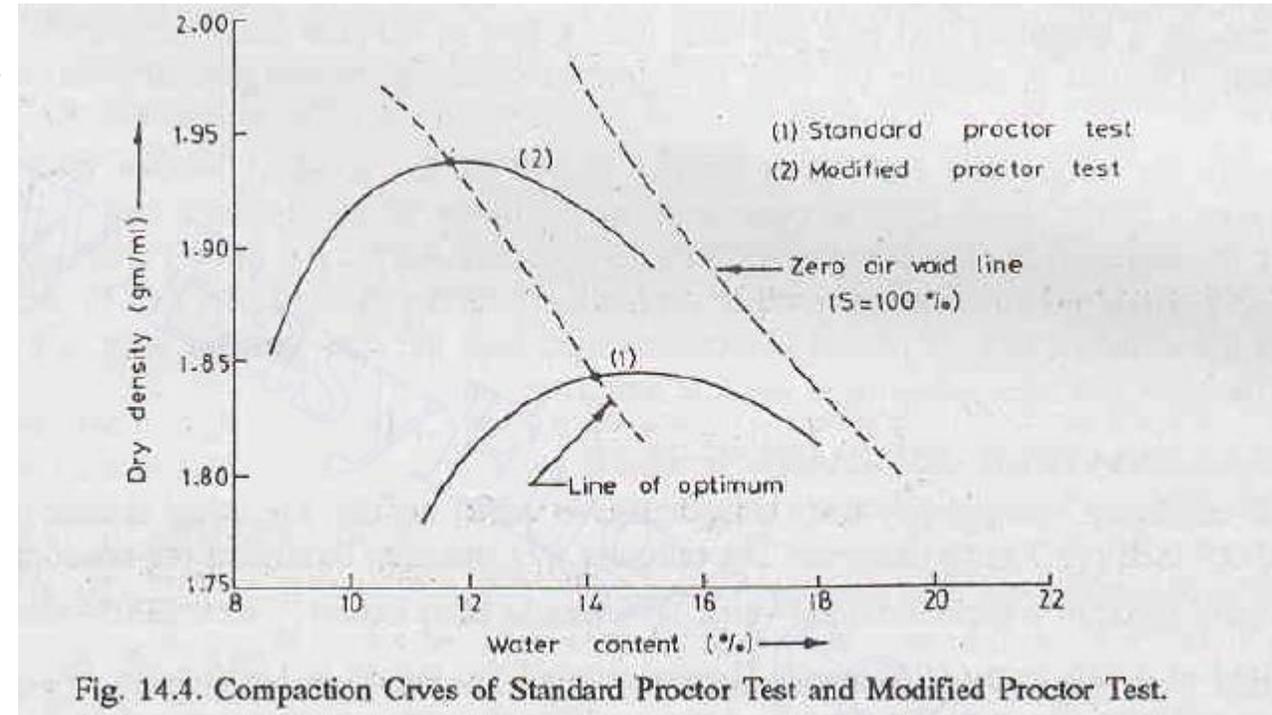

FACTORS AFFECTING COMPACTION

- Type of Soil


- Coarse-grained soils can be compacted to a higher dry density than fine-grained soils. With the addition of even a small quantity of fines to a coarse-grained soil, the soil attains a much higher dry density for the same compactive effort. But when fines are excessive, the dry density decreases.
- Well graded sand attains a much higher dry density than a poorly graded soil.
- Cohesive soils attain a relatively lower maximum dry density as compared to cohesionless soils due to high air voids.
- Clays of high plasticity have very low dry density and a very high OMC.

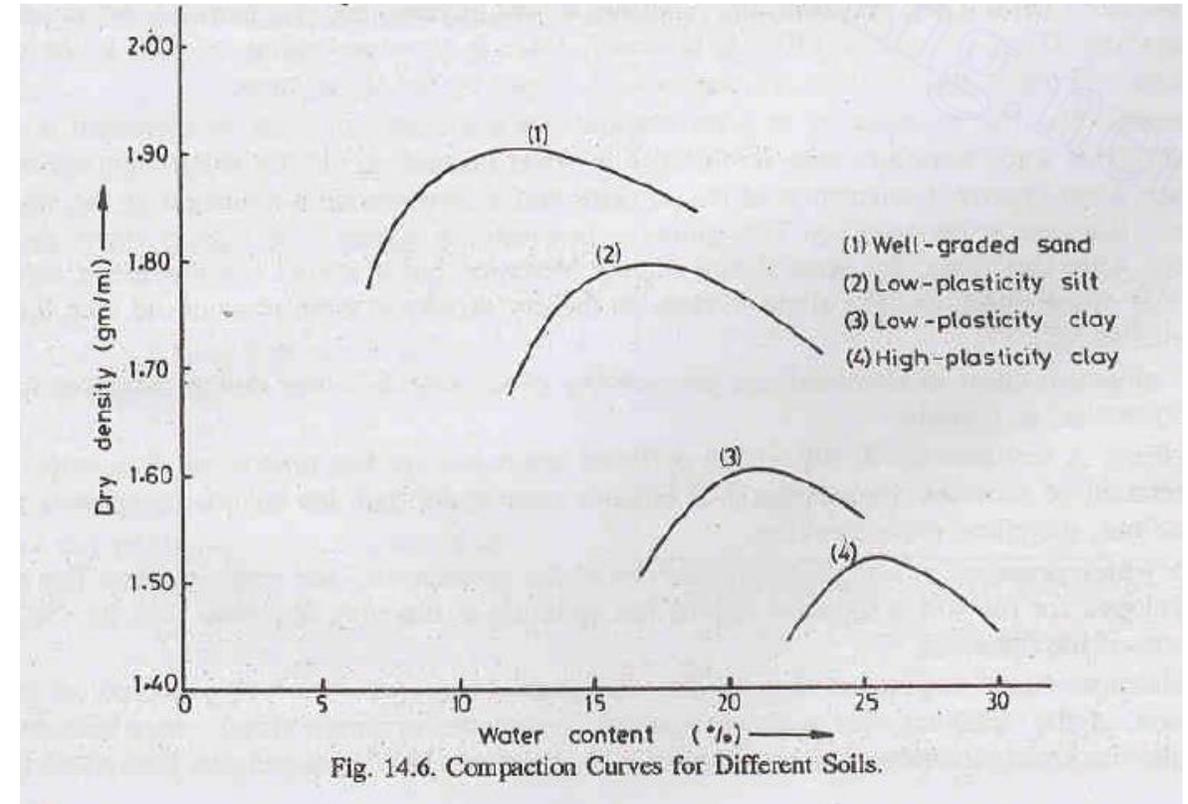

FACTORS AFFECTING COMPACTION

- Method of Compaction

- The dry density achieved depends not only upon the amount of compactive effort but also on the method of compaction.
- For the same amount of compactive effort, the dry density will depend upon whether the method of compaction utilizes kneading action, dynamic action or static action.

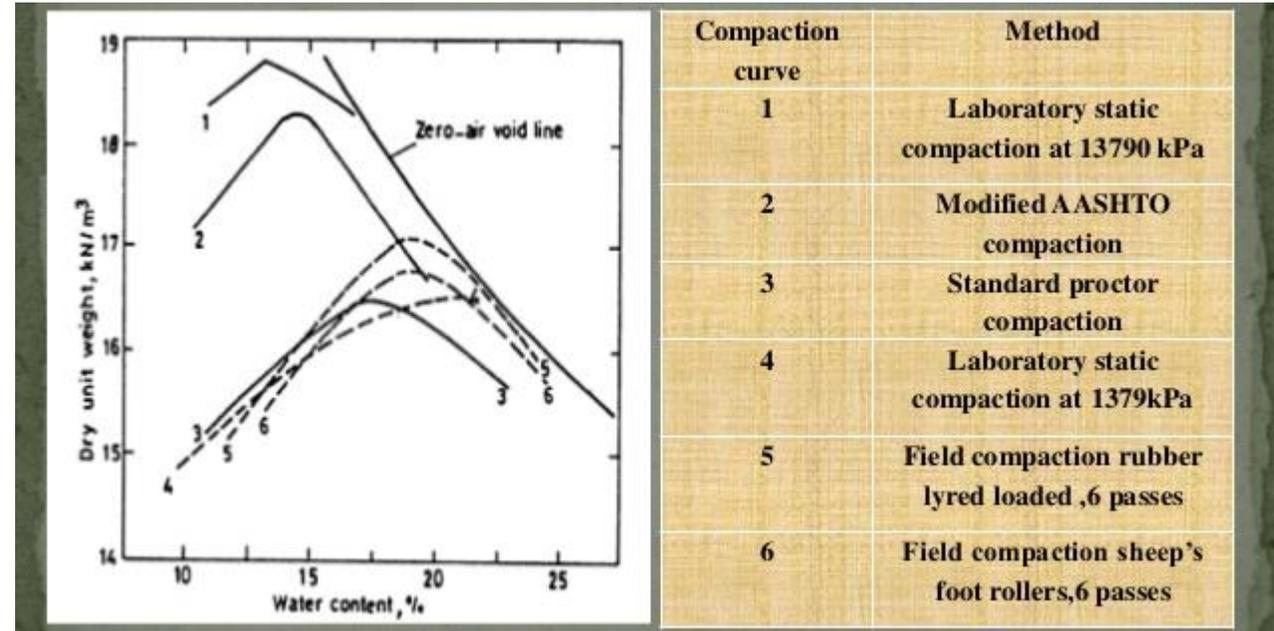

FACTORS AFFECTING COMPACTION

- Admixtures

- The compaction characteristics of the soils are improved by adding other materials, known as admixtures.
- The most commonly used admixtures are lime, cement and bitumen.



Abhash Acharya

FACTORS AFFECTING COMPACTION

- Admixtures

- The compaction characteristics of the soils are improved by adding other materials, known as admixtures.
- The most commonly used admixtures are lime, cement and bitumen.




Abhash Acharya

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- The water content of a compacted soil is expressed with reference to the OMC. Thus, soils are said to be compacted **dry of optimum** or **wet of optimum** (i.e. on the **dry side** or **wet side** of OMC). The structure of a compacted soil is not similar on both sides even when the dry density is the same, and this difference has a strong influence on the engineering characteristics.



- Soil Structure
- Permeability
- Compressibility
- Pore Water Pressure
- Swelling
- Shrinkage
- Stress-Strain Relationship

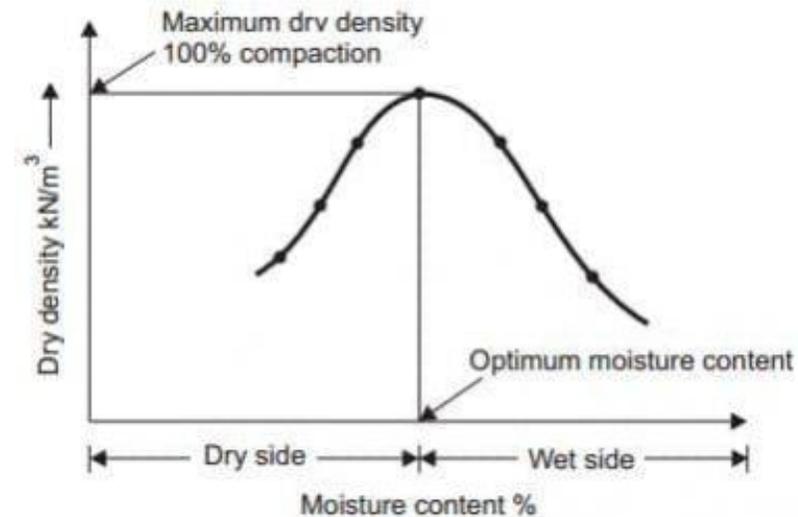

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- **Soil Structure**

For a given compactive effort, soils have a flocculated structure on the dry side (i.e. soil particles are oriented randomly), whereas they have a dispersed structure on the wet side (i.e. particles are more oriented in a parallel arrangement perpendicular to the direction of applied stress). This is due to the well-developed adsorbed water layer (water film) surrounding each particle on the wet side.

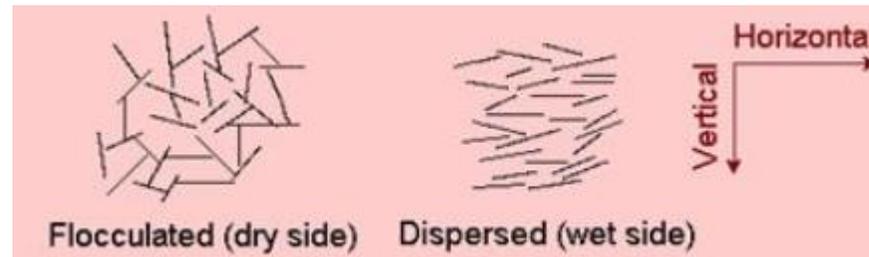
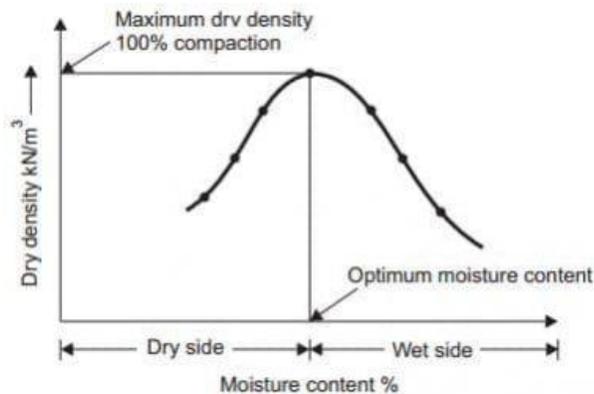


Abhash Acharya

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- **Permeability**

The randomly oriented soil in the dry side exhibits the same permeability in all directions, whereas the dispersed soil in the wet side is more permeable along particle orientation than across particle orientation.

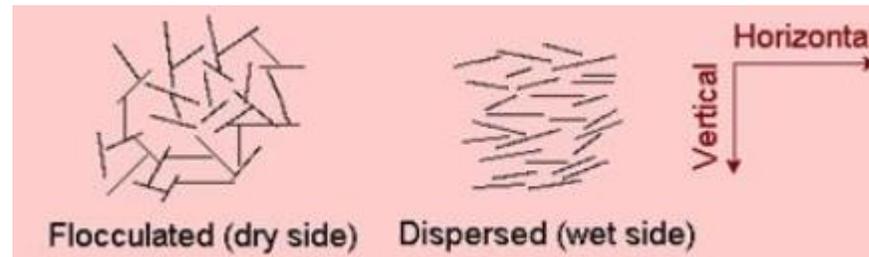
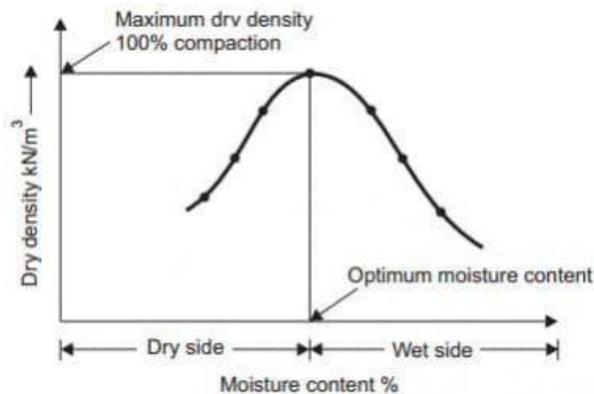


Abhash Acharya

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- **Compressibility**



The flocculated structure developed on the dry side of the optimum offers greater resistance to compression than the dispersed structure on the wet side. Thus, the soils on the dry side are less compressible.

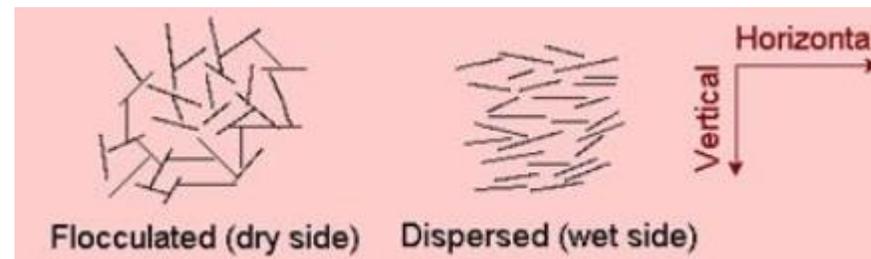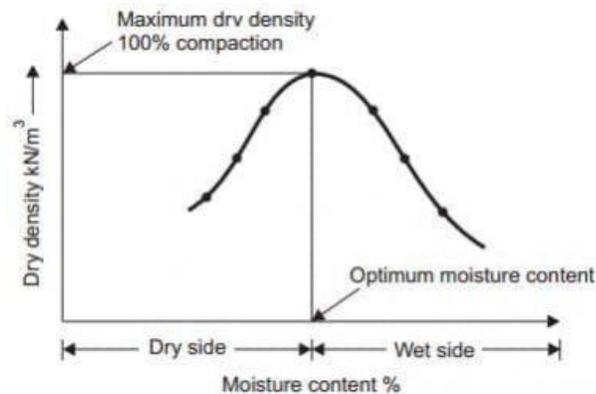

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- **Pore Water Pressure**



A sample compacted dry of the optimum has low water content. The pore water pressure for the soil compacted dry of the optimum is therefore less than that for the same soil compacted wet of the optimum.

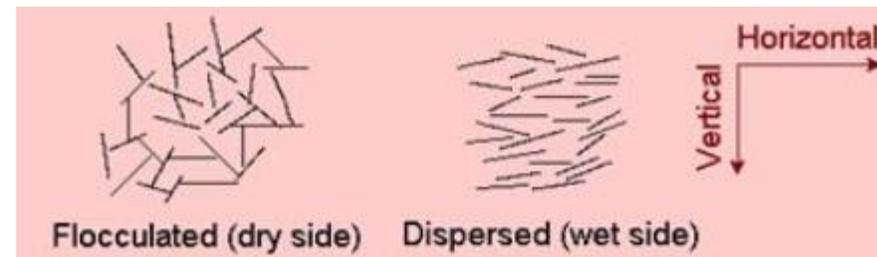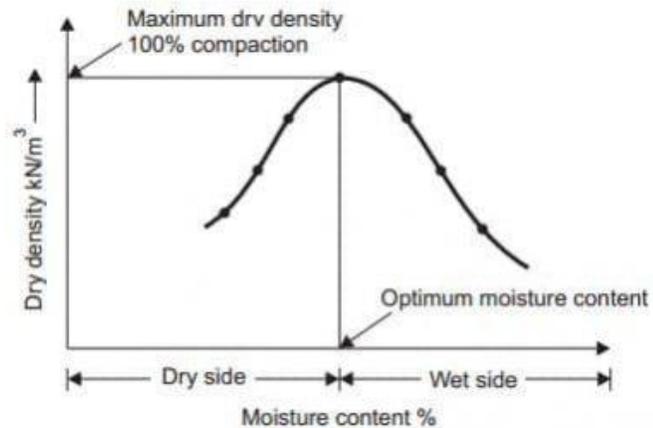

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- Swelling



Due to a higher water deficiency and partially developed water films in the dry side, when given access to water, the soil will soak in much more water and then swell more.

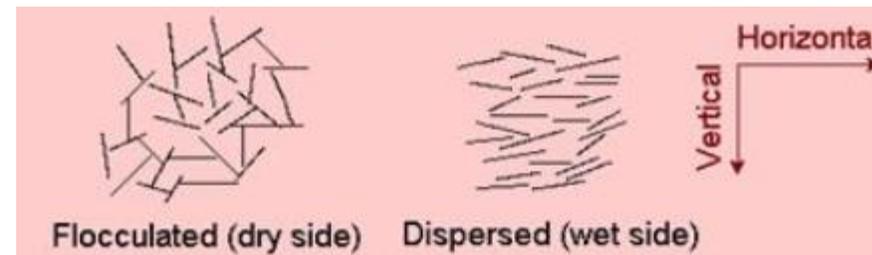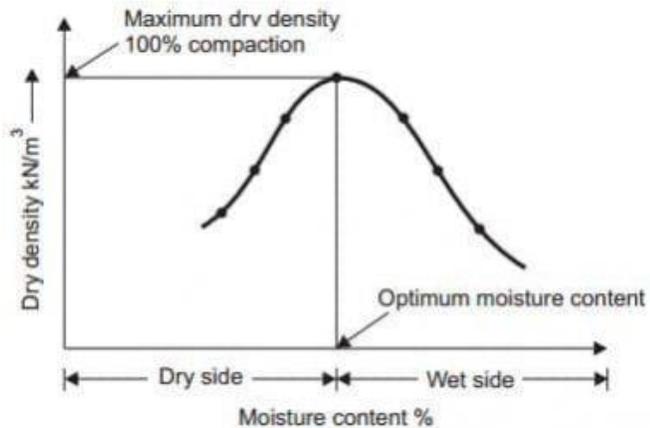

EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- Shrinkage

During drying, soils compacted in the wet side tend to show more shrinkage than those compacted in the dry side. In the wet side, the more orderly orientation of particles allows them to pack more efficiently.

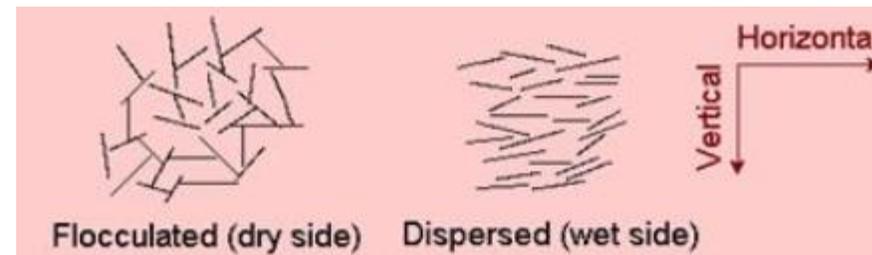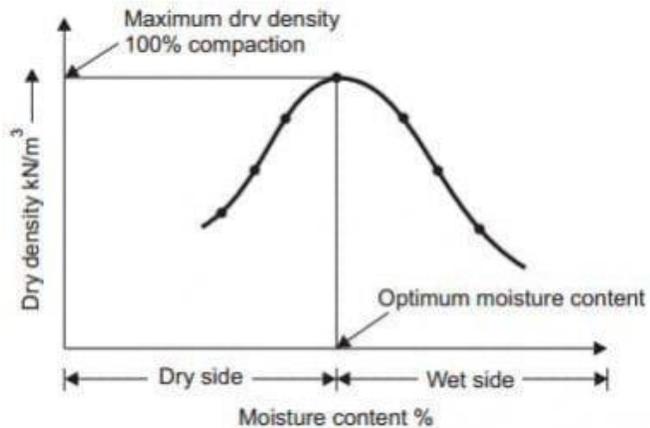


EFFECT OF COMPACTION ON ENGINEERING PROPERTIES

- **Stress-Strain Relationship**

The soils compacted dry of optimum have steeper stress-strain curve than those on the wet side. The modulus of elasticity for the soils compacted dry of the optimum is therefore high. Such soils have brittle failure.

The soils compacted on the wet of the optimum have relatively flatter stress-strain curve and a corresponding lower value of modulus of elasticity. The failure in this case occurs at a large strain and is of plastic type.

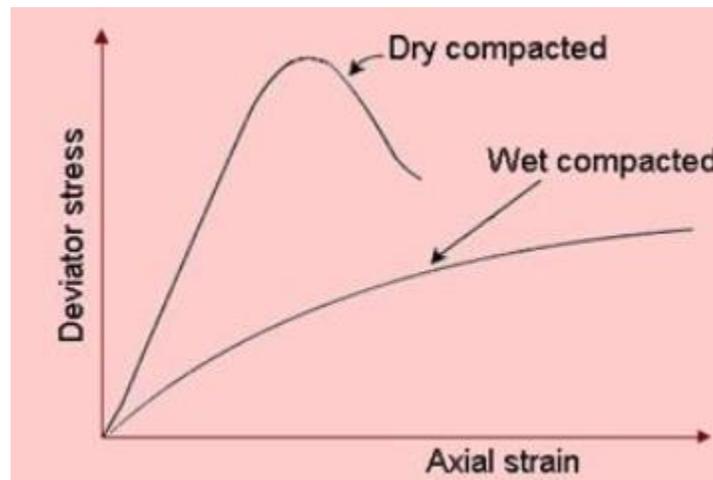

Abhash Acharya

METHOD OF COMPACTION

Compaction methods in field depends upon soil types, maximum dry density required and economic considerations. Commonly used compaction methods are:

- Tampers
- Rollers
 - Smooth Wheeled Rollers
 - Pneumatic tyred Rollers
 - Sheep-footed Rollers
 - Grid Rollers
- Vibrating Plates



The compaction achieved will depend on the thickness of lift (or layer), the type of roller, the no. of passes of the roller, and the intensity of pressure on the soil.



METHOD OF COMPACTION

Equipment	Most suitable soils	Least suitable soils
Smooth steel drum rollers (static or vibratory)	Well-graded sand-gravel, crushed rock, asphalt	Uniform sands, silty sands, soft clays
Pneumatic tyred rollers	Most coarse and fine soils	Very soft clays
Sheepsfoot rollers	Fine grained soils, sands and gravels with > 20% fines	Uniform gravels, very coarse soils
Grid rollers	Weathered rock, well-graded coarse soils	Uniform materials, silty clays, clays
Vibrating plates	Coarse soils with 4 to 8% fines	
Tampers and rammers	All soil types	



METHOD OF COMPACTION



Vibrating Plate
Rammer
Handy Compacting Tools



Walk Behind Rollers



Pneumatic Roller



Tamping Roller



Sheepfoot Roller



Smooth Roller




ZERO-AIR-VOID LINE (ZAV LINE)

Dry density can be related to water content and degree of saturation (S) as

$$\gamma_d = \frac{G_s \cdot \gamma_w}{1+e} = \frac{G_s \cdot \gamma_w}{1 + \frac{w \cdot G_s}{S}}$$

Thus, it can be visualized that an increase of dry density means a decrease of voids ratio and a more compact soil. Similarly, dry density can be related to percentage air voids (n_a) as

$$\gamma_d = \frac{(1 - n_a) G_s \cdot \gamma_w}{1 + w G_s}$$

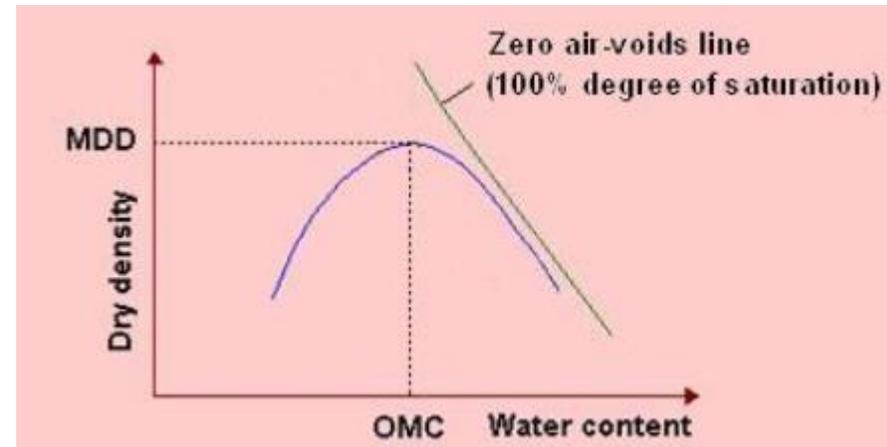


The relation between moisture content and dry unit weight for a saturated soil is the **zero air-voids line**. It is not feasible to expel air completely by compaction, no matter how much compactive effort is used and in whatever manner.



COMPACTION CONTROL AT FIELD

- The laboratory compaction tests give the optimum water content and the maximum dry density.
- In the field, during the compaction of the soils, it is essential to check the dry density and the water content in order to effect proper quality control.
- Compaction control is done by measuring the **dry density** and the **water content** of the compacted soil in the field.

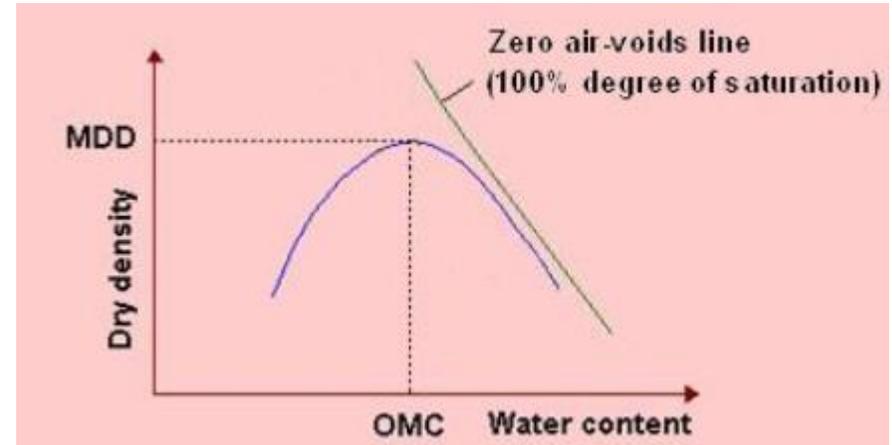

Abhash Acharya

COMPACTION CONTROL AT FIELD

- **Dry Density**
 - **Sand Replacement Method** (Suitable for cohesionless, firm, gravelly soil)
 - **Core-cutter Method** (Suitable for loose cohesive soil)



Abhash Acharya

COMPACTION CONTROL AT FIELD

- **Water Content**

- The oven-drying method of the determination of the water content takes 24 hours.
- The water content can be determined indirectly using a Proctor needle also known as plasticity needle.
- The proctor needle consists of a rod attached to a spring-loaded plunger. The stem of the plunger is marked to read the resistance in Newton.
- The needle-shank has graduations to indicate the depth of penetration.
- For cohesive soil, the needle points of larger cross-sectional areas are required and for cohesionless soil, those of smaller cross-sectional areas are used.



Abhash Acharya

- After the soil has been compacted at a given water content in the compaction test in laboratory, the rod with a suitable needle point is forced into the soil mass by 7.5cm at the rate of 1.25cm/sec.
- The maximum force used to penetrate the needle is read out of the scale. This force when divided by the needle (tip) area, will give the penetration resistance.
- A number of such measurements are made in the lab during compaction test, and a calibration curve is obtained between the penetration resistance (R) and the water content.
- To determine the water content of the compacted soil in the field, the soil is compacted in the standard compaction mould in the field. The penetration resistance of the compacted soil is measured.
- The moisture content is then obtained from the calibration curve.

COMPACTION CONTROL AT FIELD


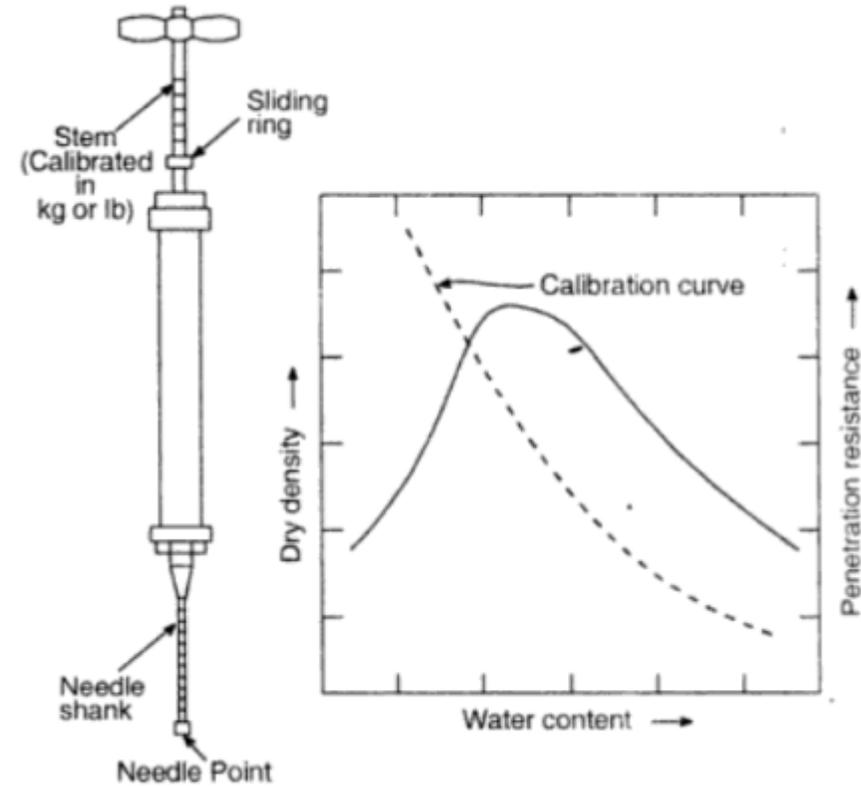


FIG. 17.6. PROCTOR NEEDLE AND CALIBRATION CURVE.



RELATIVE COMPACTION / PERCENT COMPACTION

- The dry density achieved in the field is compared with the maximum dry density obtained in the standard proctor test or that in the modified proctor test. The ratio of the dry density in the field to maximum dry density in the laboratory is known as the relative compaction or percent compaction.
- For cohesive soils, the dry density of the order of 95% of the maximum dry density of the standard proctor test can be achieved using a sheep-foot roller or a pneumatic-tyred roller.
- For moderately cohesive soils, the dry density of the order of 95% of that in modified proctor test can be achieved using pneumatic tyred roller with an inflation pressure of 600KN/m^2 .
- For very heavy clay, sheep-foot rollers are effective.
- For cohesionless soils, the dry density of the order of 100% or even more of that in the modified proctor test can be obtained using pneumatic-tyred rollers, vibratory rollers and other vibratory equipment.

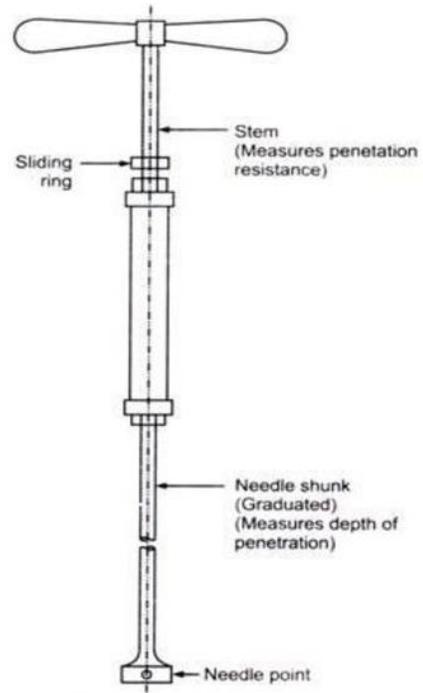

COMPACTION SPECIFICATION

- **End-Product Specification**

Relative compaction or percentage compaction is specified.

- **Method Specification**

- Type and weight of roller.
- The number of passes.
- Suitable for large projects only.



Abhash Acharya

COMPACTION AND CONSOLIDATION

Compaction	Consolidation
Volume reduces for partially saturated soil due to expulsion of air without altering water content.	Reduction in volume of soil (saturated) by squeezing of water.
It is a rapid process by mechanical means such as rolling, tamping, vibrations.	Gradual process under sustained static loading.
It is an artificial process.	It is a natural process.



Abhash Acharya